



D 201 RH
D 201 RHS
D 201 RHG
D 201 RHGS

D 250 RM
D 250 RMS
D 250 RMG
D 250 RMGS
D 250 RHG
D 250 RHGS

D 300 RM
D 300 RHG



D 250/300 R



D 201 R



www.ausa.com

AUSA Center, S.L.U. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ausa@ausa.com

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)



AUSA Madrid ● Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ausa.madrid@ausa.com
AUSA France ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ausa.france@ausa.com
AUSA ● Unit 16 Hollows Works - Shawclough Road - Rochdale - Lancs OL12 6LN (U.K.) Tel.: +44 (0) 1706 64 96 91 E-mail: ausa.uk@ausa.com
AUSA Repräsentanzbüro Deutschland ● Heinrich - Welken Str. 5, 59069 HAMM - RHYNERN (GERMANY) Tel.: +49 2385922245 E-mail: ausa.deutschland@ausa.com
AUSA Northamerica Corp. ● 2655 Le Jeune Road - Suite 808, CORAL GABLES FL 33134 (USA) Toll free: 1 800 820 AUSA E-mail: ausa.corp@ausa.com
BEIJING Rep. Office ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA
 Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com





DIMENSIONS (mm)		D 201 RH / S	D 201 RHG / S	D 250 RM / S	D 250 RMG / S D 250 RHG / S	D 300 RM	D 300 RHG
D 201 RH 2000 Kg	A	1565	1540	1840 / 1700	1568 / 1520	1840	1568
	B	1445	1545	1632 / 1560	1690 / 1605	1632	1690
D 201 RHG 2000 Kg	C	1590 / 1750	1590 / 1750	1800 / 1800	1800 / 1800	1800	1800
	D	185	185	200 / 200	200 / 200	200	200
D 250 RM 2500 Kg	E	1195	1295	1380 / 1305	1530 / 1445	1380	1530
	F	2580	2580	2240 / 2240	2240 / 2240	2240	2240
D 250 RMG 2500 Kg	G	255	255	350 / 350	350 / 350	350	350
	H	885	925	993 / 807	926 / 842	993	926
D 250 RHG 2500 Kg	I	1640	1640	1730 / 1730	1730 / 1730	1730	1730
	J	715	715	500 / 500	500 / 500	500	500
D 300 RM 3000 Kg	K	3020	3280	3231 / 3044	3164 / 2980	3231	3164
	L	2245	2665	2580 / 2550	2840 / 2885	2580	2890
D 300 RHG 3000 Kg	M	275	535	603 / 417	536 / 452	603	536
	N	570	930	570 / 720	1030 / 1105	570	1030
	R	- / 2045	- / 2045	2100 / 2100	2100 / 2100	2100	-
	S	- / 3980	- / 3980	4174 / 4174	4174 / 4174	4174	-
	T	1590	1590	1700 / 1700	1700 / 1700	1700	1700
	U	-	215	- / -	177 / 100	-	177

S : Dumper equipped with self-loading shovel

V: maximum visibility with the shovel fully retracted (patented system)

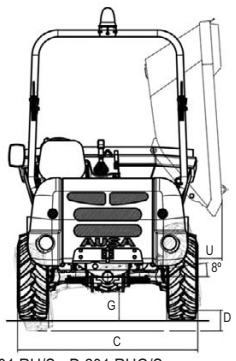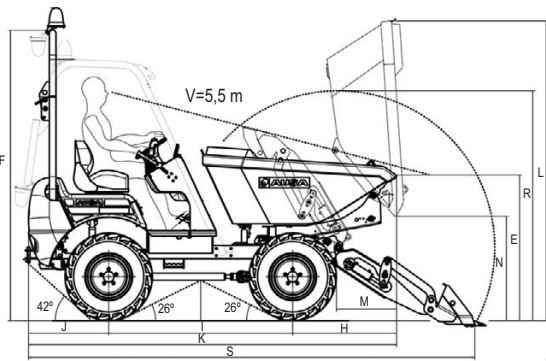

D 250 RM/S - D 250 RMG/S - D 250 RHG/S
D 300 RM - D 300 RHG

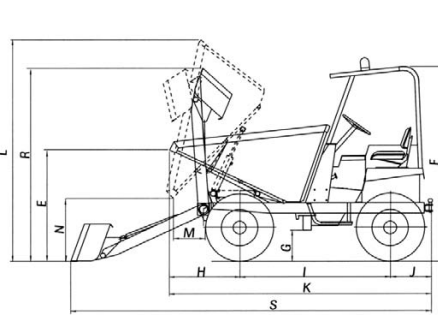

D 201 RH/S - D 201 RHG/S

TECHNICAL SPECIFICATIONS

		D 201 RH / S	D 201 RHG / S	D 250 RM / S	D 250 RMG / S	D 250 RHG / S	D 300 RM	D 300 RHG	
Load capacity (Kg)		2000		2500			3000		
Unloading system		Frontal hydraulic	Hydraulic, 180° rotating	Frontal hydraulic	Hydraulic, 180° rotating	Hydraulic, 180° rotating	Frontal hydraulic	Hydraulic, 180° rotating	
Chassis		Rigid							
Hopper capacities (l)	Water	900	850	1290 (900 w/shovel)	1050 (850 w/shovel)	1050 (850 w/shovel)	1290	1050	
	Levelled	1315	950	1800 (1315 w/shovel)	1200 (950 w/shovel)	1200 (950 w/shovel)	1800	1200	
	Heaped	1500	1200	1950 (1500 w/shovel)	1400 (1200 w/shovel)	1400 (1200 w/shovel)	1950	1400	
Engine	Diesel	KUBOTA V1505		Lombardini 9LD 626/2B2NR		ISUZU 4LE2 Tier II	Lombardini 9LD 626/2B2NR	ISUZU 4LE2 Tier II	
	Power acc./DIN 6270 B (KW/HP)	23.55/32.2 (2600 rpm)		18,2/24,7 (2800 rpm)		34,5 / 46 (3000 rpm)	18,2/24,7 (2800 rpm)	34,5 / 46 (3000 rpm)	
	Power acc./DIN 70020 (KW/HP)	25.6 / 34.8 (2600 rpm)		19,8/26,9 (2800 rpm)		37,5 / 51 (3000 rpm)	19,8/26,9 (2800 rpm)	37,5 / 51 (3000 rpm)	
	N° of Cylinders	4		2		4	2	4	
	Cooling system	Water		Air		Water	Air	Water	
Drive	4 x 4 permanent Compen ® System			4 x 4 permanent Compen ® System (Models: RM, RMG, w/shovel) / 4 x 4 permanent (Models: RHG)					
Transmission	2-speed hydrostatic Electric gear inverter on the joystick			Mechanical, with 4 forward gears and 4 reverse		2-speed hydrostatic Electric gear inverter	Mechanical, with 4 forward gears and 4 reverse		
Clutch	-			Dry single-disc \varnothing 254 mm. Mechanically-driven		-	Dry single-disc \varnothing 254 mm. Mechanically-driven		
Engine starting system	Electric								
Speed (max.) (Km/h)	20								
Unladen weight (Kg)	1600 / 1800		1850 / 2050		1970 / 2170		2000		
Gradient negotiable (with full load)	42%			35%		42%		38% / 36%	
Hydraulic circuit	Gear pump of 8 cc			Gear pump of 10.6 cc.					
	Working pressure 190 bar			Working pressure 150 bar.			Working pressure 160 bar		
Tyres	Front				10.0/75-15.3 (10 PR)				
	Rear				10.0/75-15.3 (10 PR)				
External turning circle (mm)	4190			4500					
Steering	Hydraulic. Working pressure 80 bar.			Hydraulic. Working pressure 70 bar.					
Tank capacity (l)	Fuel	40			40			30	
	Hydraulic fluid	40			30			30	
Service brake	Sealed oil-immersed multidisc			Oil-immersed, multidisc, hydraulically operated		Hydraulic, drum-type, on front driving pinion	Oil-immersed, multidisc, hydraulically operated		
Parking brake	Sealed oil-immersed multidisc			Mechanical, drum-type, on front driving pinion					

STANDARD EQUIPMENT

		Anti vandal system	
		Audible reverse warning	
		Ergonomic seat w/ seat belt	Ergonomic seat
		ROPS protection	-
		Rotating beacon	-
		Rear view mirror	-
Self-loading shovel *	Volumetric capacity	180 l.	250 l.
	Load capacity (max.)	450 kg	

* (only RMS/RHS/RMGs/RHGS models)

OPTIONAL EQUIPMENT

		Lighting equipment	
		FOPS/ROPS	FOPS/ROPS protective roof (Seat belt, rotating beacon, rear view mirror)
		Second seat	-
		Shovel teeth	
Back-hoe (only in self-loading shovel version)		-	Maximum digging deep: 2750 mm. Break out power: 3970 Kg. Transportation height: 2250 mm. Fast-attach system of the backhoe to the dumper. Operating site: 360° rotating seat. Weight: 900 Kg.